

# the art of elevation!



## **HR12**

### **SELF PROPELLED ACCESS PLATFORM**



**12.20m (40ft)**  
Working height

**6.10m (20ft 1in)**  
Working outreach

#### **Telescopic Upper Boom**

Greater accuracy when  
positioning platform

#### **1.50m Chassis Available**

Improved narrow  
aisle access

#### **Weight**

**Under 3 Tonnes**  
Low cost transportation

#### **Fully Proportional Hydraulic Controls**

Simple, reliable & easy to maintain

#### **Bi-Energy Available**

Optimising Utilisation



Kimberly Access HR12

# the art of elevation!





## Heightrider 12

The Nifty Height Rider 12 is one of the most versatile and reliable machines in its class. It is specifically designed to give maximum reach performance from the lightest, most compact base possible. A telescopic upper boom gives improved accuracy when positioning the platform and superb manoeuvrability makes it an ideal tool for a wide range of applications.

### SAFETY FEATURES

- Automatic Failsafe Brakes
- Tilt Alarm
- Foam Filled or Solid Tyres
- Manual Descent with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Dual Harness Points
- CE Mark

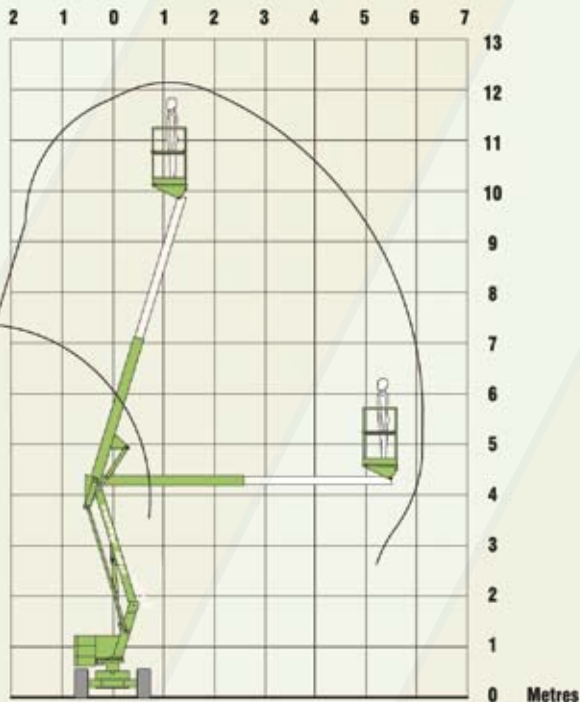

The HR12's Bi-Energy option allows it to work for extended periods inside and outside, making it the perfect all-rounder.

### SPECIFICATIONS

<b>Height - Working</b>	12.20m	40ft
<b>Height - Platform</b>	10.20m	33ft 5in
<b>Outreach - Working</b>	6.10m	20ft 1in
<b>Slew</b>	360°	
<b>Width - Standard</b>	1.80m	5ft 10in
<b>- Narrow</b>	1.50m	4ft 11in
<b>Height - Stowed</b>	1.90m	6ft 3in
<b>Length - Overall</b>	4.10m	13ft 5in
<b>Weight - Standard</b>	2,400kg*	5,285lbs*
<b>- Narrow</b>	2,950kg*	6,490lbs*
<b>Turning Radius - Inside</b>	2.22m	7ft 3in
<b>- Outside</b>	4.20m	13ft 9in
<b>Platform Capacity</b>	200kg	440lbs
<b>Platform Size</b>	1.10m x 0.65m	3ft 8in x 2ft 1in
<b>Drive Speed</b>	2.5 - 3.5mph	4 - 5.6kmph
<b>Gradeability</b>	25%	
<b>Control System</b>	Fully proportional hydraulic	
<b>Power Options</b>	Battery Only Petrol or Diesel Only Bi-Energy (engine & battery)	

\* Weights may vary according to specification, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.